


Intenergy

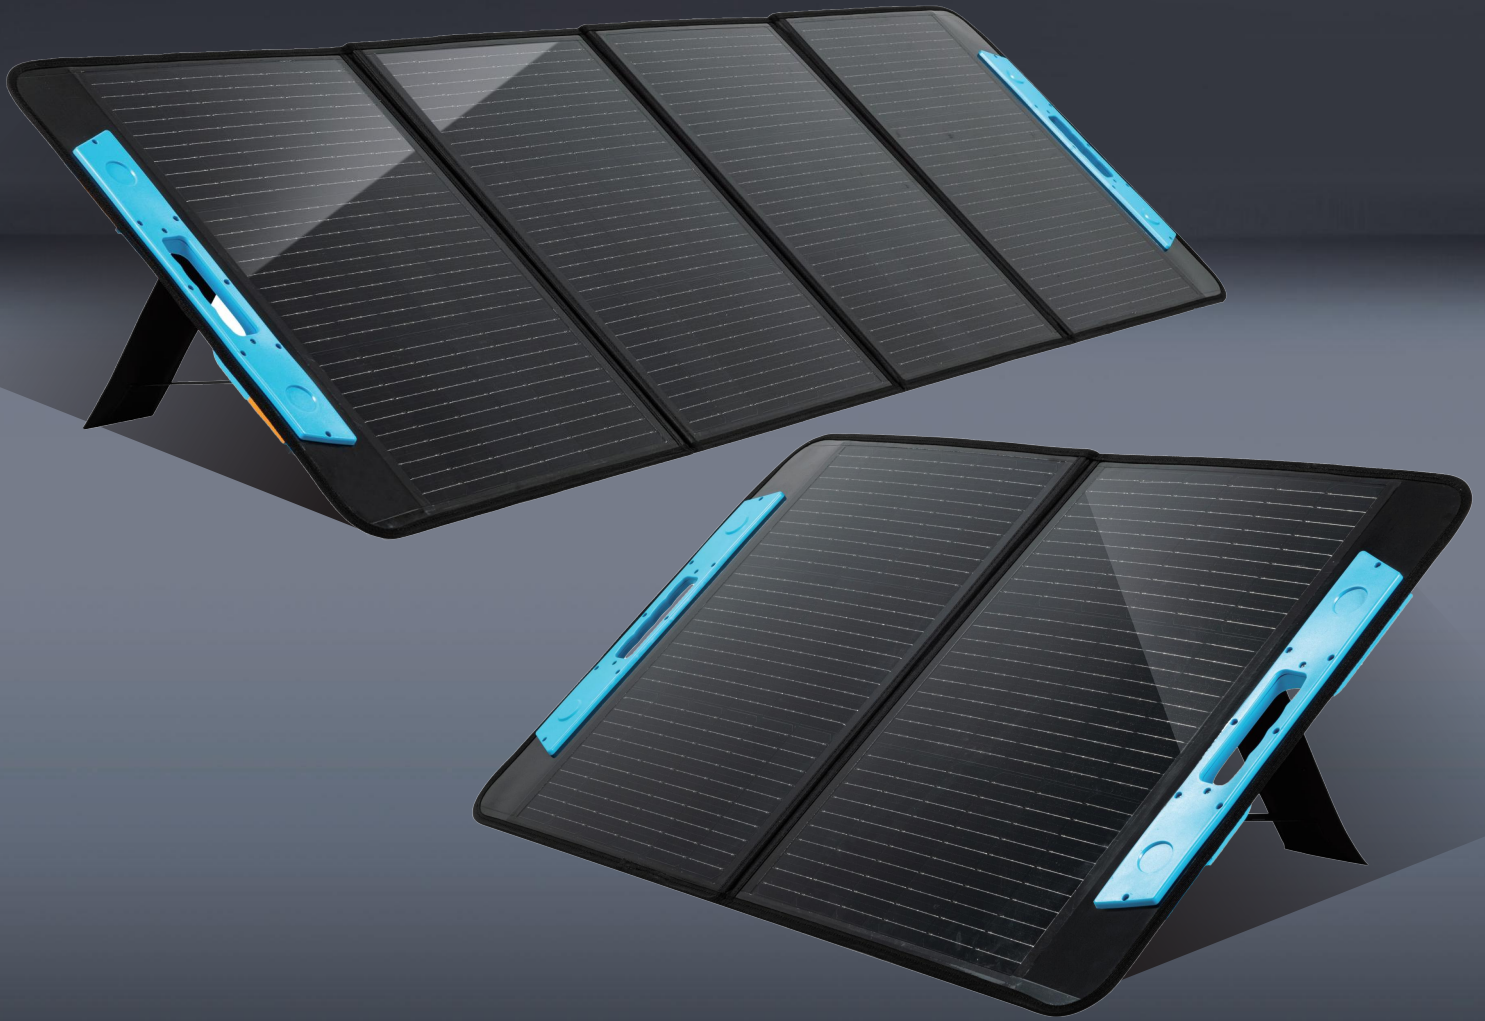

INE60-300 PRO

Foldable & Portable Solar Panel

IP65 Water-Resistance

Efficiency Up To 24%

Ultra-Thin Glass Durable

Longer Life



Over Power
Protection



Surge
Protection



Short Circuit
Protection

Item		INE-60M-2F	INE-100M-2F	INE-120M-4F	INE-160M-4F	INE-200M-4F	INE-300M-6F
Power Output	Pmax（W）	60	100	120	160	200	300
Operating Voltage	Vmp（V）	20.36	23.82	20.36	20.44	23.82	23.82
operating Current	Imp（A）	2.95	4.2	5.9	7.83	8.40	12.6
Open-Circuit Voltage	Voc（V）	24.47	28.64	24.47	24.55	28.64	28.64
Short-Circuit Current	Isc（A）	3.12	4.45	6.23	8.31	8.91	13.36
Folded Size(mm)		490*480*50	570*590*50	490*480*50	510*590*50	570*590*50	570*590*50
Unfolded Size(mm)		970*480*30	1150*590*30	1740*480*30	1920*590*30	2150*590*30	3160*590*30
Net Weight（KG）	ETFE	3.26	4.62	5.92	7.05	7.78	10.37
	GLASS	3.65	4.97	6.68	7.81	8.46	11.32
Fold		2Folded		4Folded			6Folded
Cell Efficiency		≥22%					
Cell (Material / Dimensions)		Monocrystalline silicon / 182×91mm					
Bracket		Yes					
Packing		Single Package					
Operating Temperature		-40℃ to 80℃					
Accessories		(1)Standard:Junction Box,DC 5525/5521 (2)Other Accessories can be customized					

